


## Features

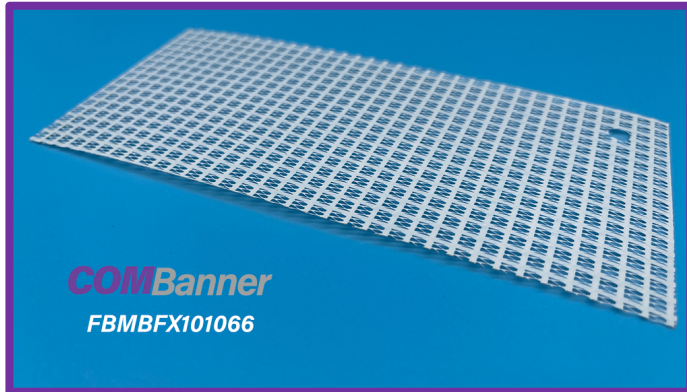

Transmittance Rate 72%; Airflow Through Rate 6983mm/s  
 PVC coated high tenacity polyester scrim 1000D\*1000D  
 PVC Liner 100gsm included is also available which prevents ink spray through when printing  
 Offer enhanced image compared to traditional meshes

## Technical Data Sheet

Item Code	FBMBFX101066	Test Method	
Base Fabric	1000D*1000D 6*6	DIN EN ISO2060	
Total Weight (GSM)	320	DIN EN ISO2286-2	
Tensile Strength	Warp (N/5cm)	850	ISO527/3:1995
	Weft (N/5cm)	820	ISO527/3:1995
Tear Strength	Warp (N/5cm)	180	ISO4674/1:2003
	Weft (N/5cm)	189	ISO4674/1:2003
Transmittance Rate	72%		
Airflow Through Rate	6983mm/s		
Temperature	-30°C/+70°C	ISO13934-1:1999	
Flame Retardant	B1/M1/M2/NFPA701		

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

## Ink Printability

SOLVENT	ECO-SOLVENT	UV	LATEX	SCREEN PRINTING
■	■	■	■	■



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,  
 Haining, Zhejiang, China  
 Tel: +86-573-80776996 Fax: +86-573-80776998  
 Mob/Skype/Wechat: +86-15858322153  
 Email: [contact@hncomax.com](mailto:contact@hncomax.com) [jeff@hncomax.com](mailto:jeff@hncomax.com)

